


ET2831HP 72A TOTAL 240 VAC CSA
24A, 24A, & 24A RESPECTIVELY

Wired Direct
Use Three Fused Safety
Disconnect



240 VAC WITH THREE 24A CIRCUITS, 18 DHMS
24A, 24A, & 24A RESPECTIVELY
1690 WATTS

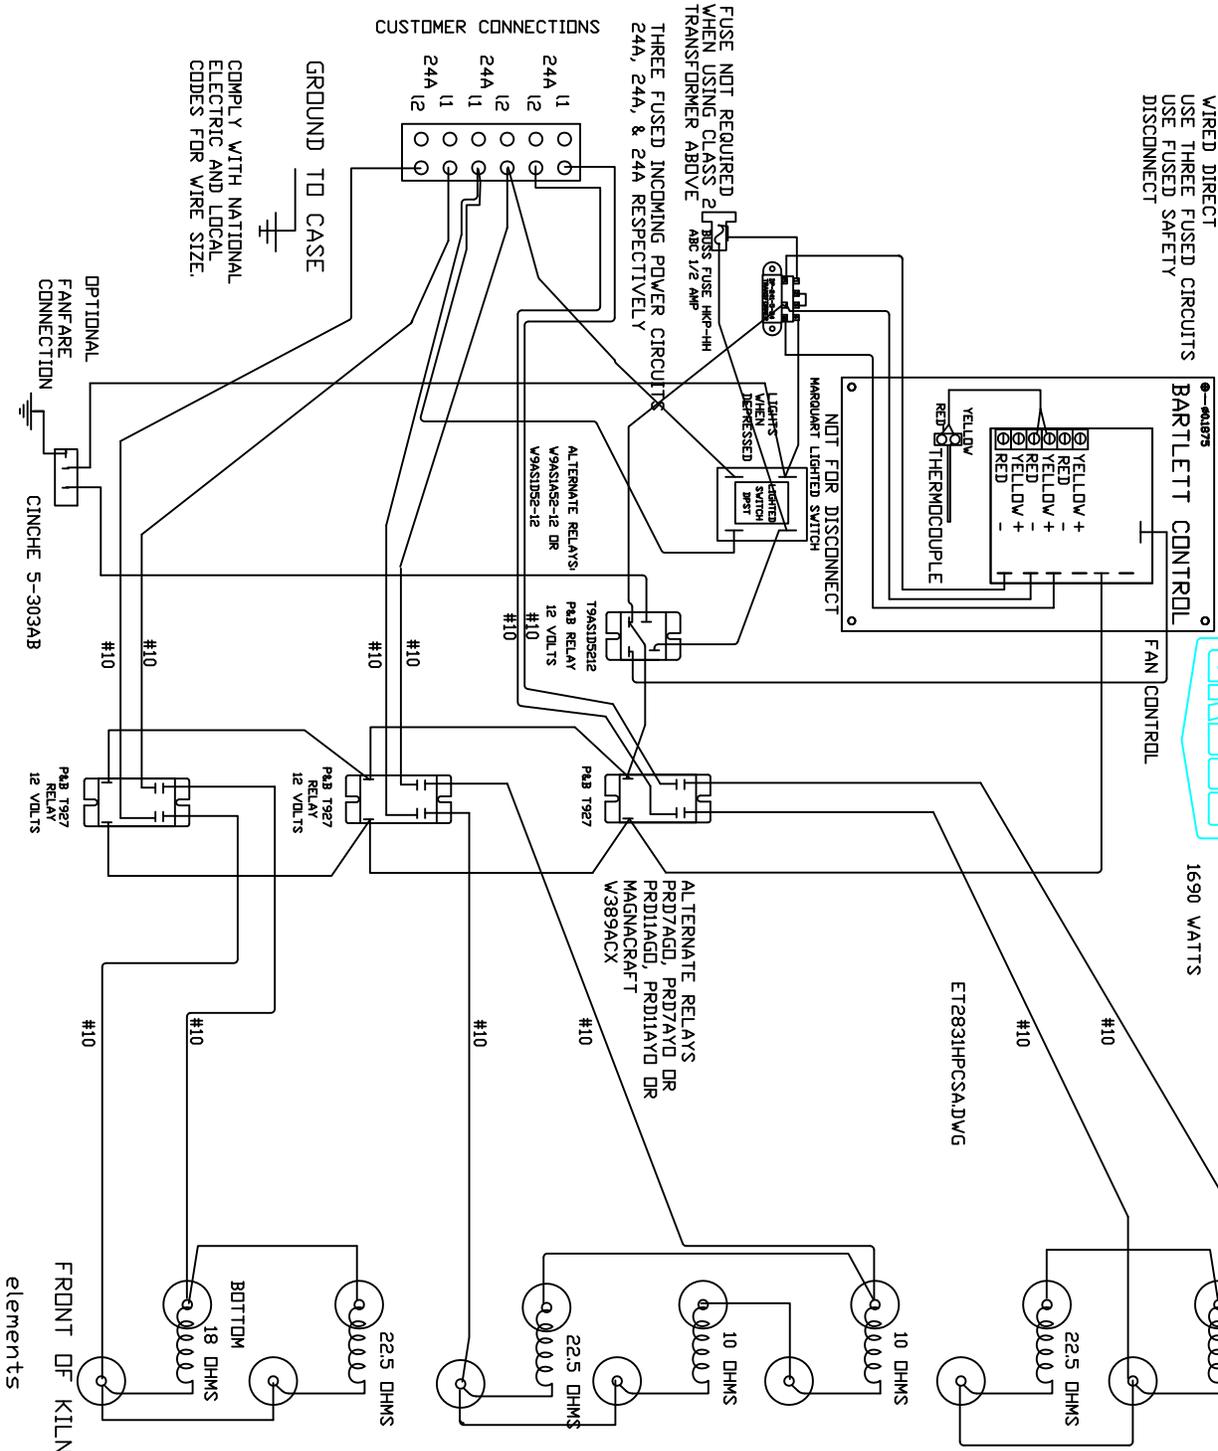

FUSE NOT REQUIRED WHEN USING CLASS 2 TRANSFORMER ABOVE

THREE FUSED INCOMING POWER CIRCUITS 24A, 24A, & 24A RESPECTIVELY

COMPLY WITH NATIONAL ELECTRIC AND LOCAL CODES FOR WIRE SIZE.

FRONT OF KILN elements